

**Resins
and
Polymers
for Paints
and
Coatings**






Hitech Industries is a leading manufacturer of solvent based and water based polymeric resins for nearly 33 years. Our resins are widely used for decorative, industrial, auto refinish, marine, can and coil coatings, adhesives, the construction chemicals and the composite industry.

Backed by state-of-the-art research & development facility, Hitech has built up a total operational capacity of 75,000 MT over a period of time.

Hitech has earned “Preferred Supplier” status and a global reputation for quality and reliability with its multinational customers.

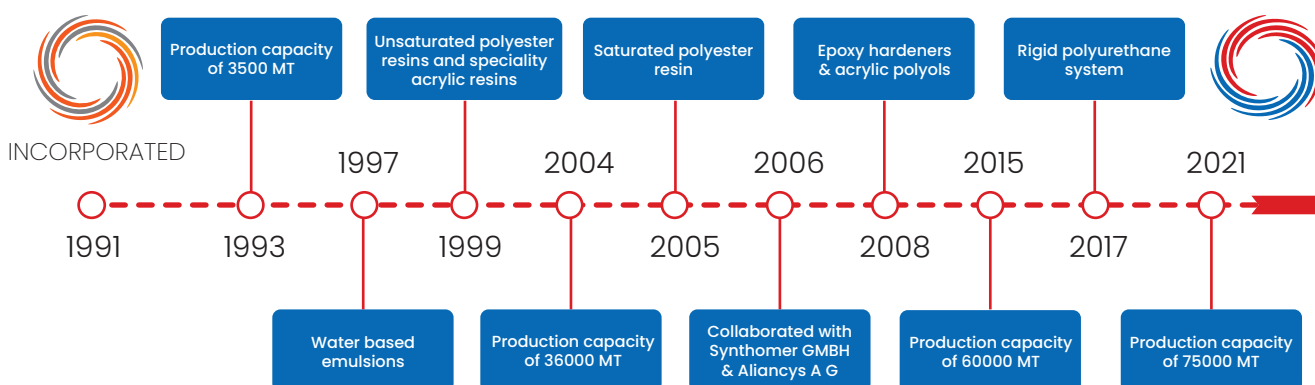

With a diversified product portfolio and the dynamic Jebel Ali Port (Dubai) facility next door. Hitech caters to 60 countries worldwide. Hitech is the first resin manufacturing company to produce speciality resins in the region for high-end applications.

Synthomer GMBH & Aliancys AG (Formerly DSM Composite Resin) have been our partners in progress for nearly 15 years.






ALKYD
RESINS



SPECIALITY
ALKYDS



SPECIALITY
RESINS

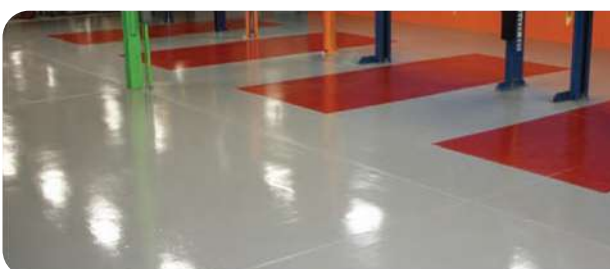

UNSATURATED
POLYESTER RESINS



SATURATED
POLYESTER RESINS



CURING
AGENTS



WATER BASED
EMULSIONS

Long Oil and Medium Oil Alkyds :

- High gloss and gloss retention
- Good drying
- Decorative enamel for interior and exterior applications
- High viscosity resin for good pigment wetting

Long Oil Alkyds

Products	% NVM (Volatile/ solvent)	Acid value (mg KOH/ gm)	Color Gardner (@% Solids)	Viscosity B4 F/C @30°C (@% Solids)	Viscosity Gardner @25°C (as such)	Oil Type	%Oil (approx)	%PA (approx)	Description / Uses
S 10001	95.0 min	15.0 max	6.0 max (as such)	20.0-25.0 Sec (70.0%)	U – Y	Fatty acid	60.0	25.0	Decorative enamel for interior and exterior applications. High solid resin for good pigment wetting.
S 10951WS	95.0+/- 1.0 (WS)	12.0 max	4.0 max (50.0%)	180.0- 220.0 Sec (50.0%)	-	Veg. oil / Fatty acid	60.0	25.0	High solids for decorative enamel for interior and exterior applications.
S 10801WS	80.0+/- 1.0 (WS)	12.0 max	4.0 max (50.0%)	150.0-180.0 Sec (50.0%)	Z7 +/-	Veg. oil / Fatty acid	60.0	25.0	Good color and gloss retention, good drying, decorative enamel for interior and exterior applications. High viscosity resin for good pigment wetting.
S 10801PWS	80.0+/- 1.0 (WS)	12.0 max	4.0 max (50.0%)	150.0-180.0 Sec (50.0%)	Z7 +/-	Veg. oil / Fatty acid	60.0	25.0	Good color and gloss retention, good drying, decorative enamel for interior and exterior applications. High viscosity resin for good pigment wetting.
S 10803PWS	80.0+/- 1.0 (WS)	10.0 max	4.0 max (50.0%)	220.0 – 240.0 Sec (50.0%)	Z7 +/-	Veg. oil / Fatty acid	60.0	25.0	High solid Alkyd. Good color and gloss retention, good drying. Decorative enamel for interior & exterior applications.
S 10701WS	70.0+/- 1.0 (WS)	12.0 max	4.0 max (50.0%)	130.0-150.0 Sec (50.0%)	Z6 +/-	Veg. oil / Fatty acid	60.0	25.0	Good color and gloss retention, good drying. Decorative enamel for interior and exterior applications.
S 10701HVWS	70.0+/- 1.0 (WS)	12.0 Max	4.0 max (50.0%)	100.0-130.0 Sec (45.0%)	Z7	Veg. oil / Fatty acid	60.0	25.0	High viscosity and rest of the properties as per S 10701WS.
S 10702WS	70.0+/- 1.0 (WS)	12.0 max	4.0 max (50.0%)	180.0- 220.0 Sec (50.0%)	Z7 – Z8	Veg. oil / Fatty acid	60.0	25.0	Good color and gloss retention, good drying. Decorative enamel for interior and exterior applications.
S 10702WS60	60.0+/- 1.0 (WS)	10.0 max	3.5 max (50.0%)	22 – 32 Sec (45.0%)	150 Ps Max	Veg. oil / Fatty acid	60.0	25.0	Good color and gloss retention, good drying. Decorative enamel for interior and exterior applications.
S 10702HVWS	70.0+/- 1.0 (WS)	12.0 max	4.0 max (50.0%)	Z1 – Z2 (50.0%)	Z8 – Z9	Veg. oil / Fatty acid	60.0	25.0	High viscosity and rest of the properties same as S 10702WS.
S 10703JWS	70.0+/- 1.0 (WS)	7.0 Max	4.0 max (40%)	200.0-220.0 Sec (50.0%)	Z9 +/-	Veg. oil / Fatty acid	60.0	25.0	Good color and gloss retention, good drying. Decorative enamel for interior and exterior applications.
S 10703JLVWS	70.0+/- 1.0 (WS)	10.0 max	7.0 max (as such)	150.0-200.0 Sec (50.0%)	Z6 – Z8	Veg. oil / Fatty acid	60.0	25.0	Good color and gloss retention, good drying. Decorative enamel for interior and exterior applications.
S 10703WS	70.0+/- 1.0 (WS)	10.0 max	4.0 max (50.0%)	230.0-250.0 Sec (50.0%)	Z9 +/-	Veg. oil / Fatty acid	60.0	25.0	Good color and gloss retention, good drying. Decorative enamel for interior and exterior applications.
S 10704WS	70.0+/-1.0 (WS)	12.0 max	4.0 max (50.0%)	250.0-280.0 Sec (50.0%)	Z9 +/-	Veg. oil / Fatty acid	60.0	25.0	Good color and gloss retention, good drying. Decorative enamel for interior and exterior applications.
S 10708WS	70.0+/-1.0 (WS)	10.0 max	3.5 max (40%)	V – Y (40%) 25 C	-	Veg. oil / Fatty acid	60.0	25.0	Very high viscosity. Good color and gloss retention, good drying. Decorative enamel for interior and exterior applications.
S 10702NY60	60+/-1.0 (WS)	13.0 max	5.0 max (as such)	100.0-130.0 Sec(50.0%)	-	Veg. oil / Fatty acid	60.0	25.0	Non yellowing, good color and gloss retention, good drying. Decorative enamel for interior and exterior applications.
S 10702NY70	70.0+/- 1.0 (WS)	13.0 max	5.0 max (as such)	100.0-130.0 Sec(50.0%)	-	Veg. oil / Fatty acid	60.0	25.0	Non yellowing, good color and gloss retention, good drying. Decorative enamel for interior and exterior applications.
S 10601EWS	60.0+/- 1.0 (WS)	12.0 max	4.0 max (50.0%)	150.0-180.0 Sec (50.0%)	-	Veg. oil / Fatty acid	60.0	25.0	Good color and gloss retention, good drying. Decorative enamel for interior and exterior applications.

Long Oil Alkyds

Products	% NVM (Volatile/ solvent)	Acid value (mg KOH/ gm)	Color Gardner (@% Solids)	Viscosity B4 F/C @30°C (@% Solids)	Viscosity Gardner @25°C (as such)	Oil Type	%Oil (approx)	%PA (approx)	Description / Uses
S 10601PWS	60.0+/- 1.0 (WS)	12.0 max	6.0 max (as such)	150.0-180.0 Sec (50.0%)	-	Fatty acid	60.0	25.0	Good color and gloss retention, good drying. Decorative enamel for interior and exterior applications.
S 10603PWS	60.0+/- 1.0 (WS)	12.0 max	4.0 max (50.0%)	220.0-240.0 Sec (50.0%)	-	Veg. oil / Fatty acid	60.0	25.0	Very High viscosity, Good color and gloss retention, good drying. Decorative enamel for interior and exterior applications.
S 10551WS	55.0+/-1.0 (WS)	12.0 max	4.0 max (50.0%)	75.0-95.0 Sec (50.0%)	T - W	Veg. oil / Fatty acid	60.0	25.0	Good color and gloss retention, good drying. Decorative enamel for interior and exterior applications. Primers for metal and wood interior & exterior finishes.
S 10552WS	80.0+/- 1.0 (WS)	7.0 max	4.0 max (50.0%)	200.0 - 220.0 Sec(50 %)	Z1 - Z2	Veg. oil / Fatty acid	60.0	25.0	High viscosity and rest of the properties same as S 10551WS.
S 10651WS	65.0+/-1.0 (WS)	10.0 max	6.0 Max	-	Z2 - Z4 (as such)	Veg. oil / Fatty acid	60.0	25.0	Good color and gloss retention, good drying. Decorative enamel for interior and exterior applications.
S 10702HVN	70.0+/- 1.0 (WS)	13.0 max	5.0 max (As such)	180.0 - 220.0 Sec (50 %)	Z9 +/-	Veg. oil / Fatty acid	60.0	25.0	Non yellowing, good color and gloss retention, Excellent drying. Decorative enamel for interior & exterior applications.
S 10704HVWS	70.0+/- 1.0 (WS)	12.0 Max	4.0 max (50.0%)	340.0-380.0 Sec (50.0%)	Z9 +/-	Veg. oil / Fatty acid	60.0	25.0	Good color and gloss retention, good drying with improved hardness. Decorative enamel for interior & exterior applications.
S 10554HVWS	55.0+/- 1.0 (WS)	12.0 max	4.0 max (50.0%)	340.0-380.0 Sec (50.0%)	Z3 - Z5	Veg. oil / Fatty acid	60.0	25.0	Good color and gloss retention, good drying with improved hardness. Decorative enamel for interior & exterior applications.

Medium Oil Alkyds

Products	% NVM (Volatile/ solvent)	Acid value (mg KOH/ gm)	Color Gardner (@% Solids)	Viscosity B4 F/C @30°C (@% Solids)	Viscosity Gardner @25°C (as such)	Oil Type	%Oil (approx)	%PA (approx)	Description / Uses
S 20502WS	50.0+/- 1.0 (WS)	15.0 max	4.0 max (40.0%)	220.0- 240.0 Sec (40.0%)	Z4 - Z6	Veg. oil / Fatty acid	50.0	35.0	Architectural undercoats, general purpose white and dark shade enamels, primers for auto refinsh.
S 20505WS	50.0+/-1.0 (WS)	12.0 Max	4.0 max (40%)	230.0- 260.0 Sec (40.0%)	X - Y (@ 40% Solid)	Veg. oil / Fatty acid	50.0	35.0	Fast drying for architectural undercoats, general purpose white and dark shade enamels.
S 20552WS	55.0+/- 1.0 (WS)	15.0 max	4.0 max (40.0%)	90.0-120.0 Sec (40.0%)	Z6 - Z8	Veg. oil / Fatty acid	50.0	35.0	Architectural undercoats, general purpose white and colored enamels, fast drying, auto refinsh.
S 20552WS	55.0+/- 1.0 (WS)	12.0 max	4.0 max (40.0%)	220.0-240.0 Sec (40.0%)	-	Veg. oil / Fatty acid	50.0	35.0	Architectural undercoats, general purpose white and colored enamels, fast drying, auto refinsh.
S 20601WS	60.0+/- 1.0 (WS)	12.0 max	4.0 max (40.0%)	180.0-220.0 Sec (40.0%)	-	Veg. oil / Fatty acid	50.0	35.0	Architectural undercoats, general purpose white and dark shade enamels, fast drying auto refinsh.
S 20601XL	60.0+/- 1.0 (Xylene)	10.0 max	4.0 max (50.0%)	170.0-200.0 Sec (50.0%)	-	Veg. oil / Fatty acid	50.0	35.0	Architectural undercoats, general purpose white and dark shade enamels, fast drying auto refinsh.
S 20701XL	70.0+/- 1.0 (Xylene)	15.0 max	4.0 max (50.0%)	170.0-200.0 Sec (50.0%)	-	Veg. oil / Fatty acid	50.0	35.0	Architectural undercoats, general purpose white and dark shade enamels.
S 20557 XLWS	55.0+/- 1.0 (WS)	15.0 max	4.0 max (40.0%)	90.0-120.0 Sec (40.0%)	Z6 - Z8	Veg. oil / Fatty acid	50.0	35.0	Architectural undercoats, general purpose white and colored enamels, extra fast drying with better flow and levelling, auto refinsh.
S 20557 NYWS	55.0+/- 1.0 (WS)	15.0 max	4.0 max (40.0%)	90.0-120.0 Sec (40.0%)	Z6 - Z8	Veg. oil / Fatty acid	50.0	35.0	Architectural undercoats, general purpose white and colored enamels, better non yellowing performance with better flow and levelling, auto refinsh.

Short Oil Alkyds (Non drying oil)

- For industrial stoving enamels, clear and pigmented NC lacquers and PU systems
- Excellent gloss, hardness, flexibility and excellent non yellowing properties in baking enamels

Urethane Modified Alkyds

- For wood finishes, parquet floor coatings and exclusively for interior and exterior coatings
- Good air drying with excellent gloss and abrasive resistance

Short Oil Alkyds (Air Drying / Chain Stopped)

- For air drying cum stoving enamels, top coat industrial finishes, dipping enamels
- Fast air drying, resistance to yellowing and good hardness

Styrene Modified Alkyds

- For industrial coatings, insulation varnish, machinery equipment's and hammer tone finish
- Rapid initial and through drying

Acrylic Modified Alkyds

- For use in industrial stoving enamels including can and coil coatings
- Rapid drying, quick rise in hardness and excellent flexibility

Aluminium Paint Medium

- For aluminium paints with good anti rust properties
- Good adhesion to metal, having good solvent and chemical resistance

Alkyd Polyol

- For industrial top coats, primers for metal, wood and aluminium substrates suitable for two pack PU
- Excellent gloss, recoat ability, fast drying and excellent chemical resistance

Short Oil Alkyds (Non Drying Oil)

Products	% NVM (Volatile/ solvent)	Acid value (mg KOH/ gm)	OH value (mg KOH/ gm)	Color, Gardner/ Hazen @ solids	Viscosity Gardner @25°C/ @ 50% XL*	Oil Type	%Oil (approx)	%PA (approx)	Description / Uses
S 4060ISN	60.0+/- 1.0 (SN 100)	10.0 max	95.0 - 100.0	2.0 max (60.0%)	Z2 - Z3	Saturated Fatty Acid	32.0 +/-2.0	41.0-43.0	For general Industrial purpose, domestic appliances and can coating.
C 40602XL	60.0+/- 1.0 (Xylene)	15.0 max	115.0-125.0	2.0 max (50.0%)	P - S	Coconut oil fatty acid (COFA)	32.0 +/-2.0	41.0-43.0	For industrial stoving enamels, clear and pigmented NC lacquers and PU systems. Excellent gloss, hardness, flexibility and excellent non yellowing properties in baking enamels.
C 40603XL	60.0+/- 1.0 (Xylene)	15.0 max	115.0-125.0	2.0 max (50.0%)	W - Z	Coconut oil fatty acid (COFA)	32.0 +/-2.0	41.0-43.0	High viscosity, low color. For industrial stoving enamels, clear and pigmented NC lacquers and PU systems. Excellent gloss, hardness, flexibility and excellent non yellowing properties in clear/ pigmented baking enamels.
C 40701XL	70.0+/- 1.0 (Xylene)	15.0 max	120.0-130.0	2.0 max (50.0%)	W - Z	Coconut oil fatty acid (COFA)	32.0 +/-2.0	41.0-43.0	For industrial stoving enamels, clear and pigmented NC lacquers and PU systems. Excellent gloss, hardness, flexibility and excellent non yellowing properties in clear/ pigmented baking enamels.
C 40702XL	70.0+/- 1.0 (Xylene)	15.0 max	115.0-125.0	2.0 max (50.0%)	P - S	Coconut oil fatty acid (COFA)	37.0 +/-2.0	41.0-43.0	For industrial stoving enamels, clear and pigmented NC lacquers and PU systems. Excellent gloss, hardness, flexibility and excellent non yellowing properties in baking enamels.
C 40703XL	70.0+/- 1.0 (Xylene)	15.0 max	100.0-110.0	2.0 max (60.0%)	X - Z @ 60.0%	Coconut oil fatty acid (COFA)	32.0 +/-2.0	41.0-43.0	Industrial baking enamels for light fixtures and home appliances, auto refinishing lacquers. Clear and pigmented NC lacquer based top coats for furniture and electrical appliances. Two pack PU systems for metal and wood coatings.
C 40701 WWXL	70.0+/- 1.0 (Xylene)	15.0 max	120.0-130.0	1.0 max (50.0%)	W - Z	Long chain special acid	32.0 +/-2.0 (Long chain acid)	41.0-43.0	Very very colour polyester with use of special long chain acid for industrial stoving enamels, clear and pigmented NC lacquers and PU systems. Excellent gloss, hardness, flexibility and excellent non yellowing properties in clear/pigmented baking enamels.
C 40603 WWXL	60.0+/- 1.0 (Xylene)	15.0 max	115.0-125.0	1.0 max (50.0%)	W - Z	Coconut oil fatty acid (COFA)	32.0 +/-2.0	41.0-43.0	High viscosity, very very low color. For industrial stoving enamels, clear and pigmented NC lacquers and PU systems. Excellent gloss, hardness, flexibility and excellent non yellowing properties in clear/ pigmented baking enamels.

Urethane Modified Alkyds

Products	% NVM (Volatile/ solvent)	Acid value (mg KOH/ gm)	Color Gardner @ solids	Viscosity B4 F/C@30°C (%Solids WS)	Viscosity Poise/ Gardner @25°C	Oil Type	%Oil (approx)	Isocyanate Type / %	Description / Uses
S 60551WS	55.0+/-1.0 (WS)	2.0 max	7.0 max (as such)	-	X - Z	Veg. oil / Fatty acid	60.0+/-1.0	Aromatic 15.0 Max	General purpose urethane alkyd with good abrasion resistance and good drying properties.
S 60553WS	55.0+/-1.0 (WS)	2.0 max	8.0 max (45.0 %)	90.0 - 120.0 Sec (45.0%)	Z6 +	Veg. oil / Fatty acid	60.0 +/-1.0	Aromatic 15.0 Max	Single pack having good air drying with excellent gloss and abrasive resistance recommended for wood finishes, parquet/ floor coatings and exclusively for interior coatings.
S 60553LVWS	55.0+/-1.0 (WS)	2.0 max	6.0 max (as such)	-	11.0 - 14.0 Ps	Veg. oil / Fatty acid	60.0 +/-1.0	Aromatic 15.0 Max	Low viscosity, single pack having good air drying with excellent gloss and abrasive resistance recommended for wood finishes, parquet/floor coatings and exclusively for interior coatings only.
S 60553HVWS	55.0+/-1.0 (WS)	2.0 max	6.0 Max (45.0%)	130.0 - 150.0 Sec (45.0%)	-	Veg. oil / Fatty acid	60.0+/-1.0	Aromatic 15.0 Max	High viscosity single pack having good air drying with excellent gloss and abrasive resistance recommended for wood finishes, parquet/floor coatings and exclusively for interior coatings.
S 60601LVWS	60.0 +/-1.0 (WS)	2.0 max	6.0 max (as such)	-	45.0-65.0 Ps @ 25 °C	Veg. oil / Fatty acid	60.0 +/-1.0	Aromatic 15.0 Max	High solid, single pack having good air drying with excellent gloss and abrasive resistance recommended for wood finishes, parquet/floor coatings and exclusively for interior coatings only.
S 60601HVWS	60.0 +/-1.0 (WS)	2.0 max	6.0 max (50.0%)	250.0 - 300.0 Sec (50.0%)	1500.0 +/- 350.0 Ps	Veg. oil / Fatty acid	60.0 +/-1.0	Aromatic 15.0 Max	High solid, single pack having good air drying with excellent gloss and abrasive resistance recommended for wood finishes, parquet/floor coatings and exclusively for interior coatings only.
S 60603ExtWS	60.0 +/-1.0 (WS)	2.0 max	6.0 max (50.0%)	50.0 - 65.0 Sec (50.0%)	40.0-65.0 Ps	Veg. oil / Fatty acid	60.0 +/-2.0	Aliphatic 15.0 Max	Single pack having good air drying with excellent gloss and abrasive resistance recommended for wood finishes, parquet/ floor coatings and exclusively for exterior coatings only.

Short Oil Alkyds (Air Drying / Chain Stopped)

Products	% NVM (Volatile/ solvent)	Acid value (mg KOH/ gm)	OH value (mg KOH/ gm)	Color, Gardner @ 50% solids XL	Viscosity Gardner @25°C/ @ 50% XL	Viscosity Data	Oil Type	%Oil (approx)	%PA (approx)	Description / Uses
S 50553XL	55.0+/- 2.0 (Xylene)	15.0 max	105.0 - 115.0	5.0 Max	Z4 - Z5 (as such)	50 - 70 Sec (100 Resin + 35 Xyl On FC B4)	Soya fatty acid (SOFA)	30.0 +/- 2.0	29.0 - 31.0	For airdrying cum force drying enamel , for top coats for machinery / equipments and industrial dipping enamel.
S 50601XL	60.0+/- 1.0 (Xylene)	15.0 max	65.0 - 75.0	4.0 max	S - U	130-170 Sec (50% @ 30°C in FC B4)	Soya fatty acid (SOFA)	34.0 +/- 2.0	30.0 - 32.0	Air drying cum stoving enamels, top coat industrial finishes, dipping enamels. Fast air drying, resistance to yellowing and good hardness.
S 50603XL	60.0+/- 1.0 (Xylene)	10.0 max	85.0 - 95.0	3.0 max	Z5 - Z7 (as such)	50 - 70 Sec (42% @ 30°C in FC B4)	Tall oil fatty acid (TOFA)	30.0 +/- 2.0	29.0 - 31.0	For stoving, air drying, two pack PU systems and acid catalysed UF for wo- od finishes. Fast drying, good gloss, good hardness.
S 50602XL	60.0+/- 1.0 (Xylene)	8.0 max	110.0 - 120.0	5.0 max	90 - 130 Ps on BF	-	Tall oil fatty acid (TOFA)	30.0 +/- 2.0	29.0 - 31.0	For air drying cum stoving enamel, twin pack PU primer.
S 50702HVXL	70.0+/-2.0 (Xylene)	8.0 Max	110.0 - 120.0	5.0 max (60.0%)	Z5 - Z6 (60.0%)	90 - 130 Ps on BF (60%)	Tall oil fatty acid (TOFA)	30.0 +/- 2.0	29.0 - 31.0	For general industrial stoving enamel, pigmented poly urethane/ NC Lacqu- ers/ acid curing finishes.
S 50701XL	70.0+/-1.0 (Xylene)	15.0 max	115.0 - 120.0	4.0 max	X - Z1	90-105 Sec 100Resin +40gm (2:1 XYL:Buta nol) @ 25°C FC B4	Soya fatty acid (SOFA)	30.0 +/- 2.0	29.0 - 31.0	For stoving cum air drying industrial enamels. Fast drying suitable for auto refinish, good gloss, hardness and chemical resistance.
S 50701PTXL	70.0+/- 2.0 (Xylene)	15.0 max	115.0 - 120.0	4.0 max	Z2 - Z4	120 - 150 Sec 100Resin + 40gm (2:1 XYL:Buta nol) @ 25°C FC B4	Soya fatty acid (SOFA)	32.0 +/- 2.0	29.0 - 31.0	For stoving cum air drying industrial enamels. Fast drying suitable for auto refinish, Good gloss, hardness and chemical resistance. With good petrol and WS tolerance.
S 50554XL	55.0+/- 2.0 (Xylene)	15.0 max	90.0 - 110.0	5.0 max	Z2 - Z4	45 - 55 sec (40% Xylene on FC B4 at 30° C	Soya fatty acid (SOFA)	30.0 +/- 2.0	29.0 - 31.0	For airdrying cum force drying enamel , for top coats for machinery / equipm- ents and industrial dipping enamel

Styrene Modified Alkyds

Products	% NVM (Volatile/ solvent)	Acid value (mg KOH/ gm)	Color Gardner @ solids	Viscosity B4 F/C@ 30°C (%Solids WS)	Viscosity Poise/ Gardner @25°C	Oil %	%PA (Approx)	Description / Uses
S 30551XL	55.0 +/-1.0 (Xylene)	15.0 max	5.0 max	100 - 120 Sec (B4 cup @ 28% Solid, 25°C)	Z6 - Z7	31.0 - 32.0	15.0 - 17.0	Low solid ,very high viscosity, quick drying , suitable in protective surface coatings such as primers , top coat and hammer tone finishes.
S 30601XL	60.0 +/-1.0 (Xylene)	15.0 max	6.0 max	16.0 - 28.0	Y - Z2	31.0 - 32.0	15.0 - 17.0	Medium viscosity, quick drying, industrial finishes, insulating varnish and machinery equipment.
S 30601LVXL	60.0 +/-1.0 (Xylene)	15.0 max	6.0 max	5.0 - 8.0	T - V	31.0 - 32.0	15.0 - 17.0	Low viscosity, quick drying, industrial finishes, insulating varnish, machinery equipment.
S 30601HVXL	62.0 +/-1.0 (Xylene)	15.0 max	6.0 max	80.0 - 130.0 @ 25°C	Z4 - Z6	31.0 - 32.0	15.0 - 17.0	Very high viscosity, quick drying. Large pattern hammer finishes, fast drying industrial finishes. Good recoat ability and chemical resistance.
S 30602WS	60.0 +/-1.0 (WS)	3.0 max	5.0 max	3.5 - 4.5 @ 25°C	-	31.0 - 32.0	15.0 - 17.0	Suitable with aluminium paste for properties of long lasting shining and good gloss.
S 30701XL	70.0 +/-1.0 (Xylene)	15.0 max	6.0 max	110.0 - 130.0	Z5 - Z6	31.0 - 32.0	15.0 - 17.0	High solid, quick drying suitable for hammer tone finishes. Excellent hardness and chemical resistance.
S 30607 XL	60.0 +/-1.0 (WS)	15.0 max	6.0 max	50.0 - 60.0 (@25° C)	-	31.0 - 32.0	15.0 - 17.0	Medium viscosity, quick drying, industrial finishes, insulating varnish and machinery equipment.
S 30551 HVXL	56.0 +/-2.0 (Xylene)	15.0 max	8.0 max	140 - 160 Sec (B4 cup @ 28% Solid, 25°C)	Z6 - Z7	31.0 - 32.0	15.0 - 17.0	Low solid ,extra high viscosity, quick drying , suitable in protective surface coatings as primers , top coat and hammer tone finishes

Acrylic Modified Alkyds

Products	% NVM (Volatile/ solvent)	Acid value (mg KOH/ gm)	Color Gardner	Viscosity BF @ 25°C	Viscosity Gardner @25°C	Oil %	%PA (Approx)	Description / Uses
S 35605SN	60.0 +/-1.0 (SN 150)	7.0 max	3.0 max	25.0 - 35.0	Z1 - Z2	39.0 - 41.0	15.0 - 17.0	Acrylated modified alkyd resin for pigmented roller coating enamels and baking system.
S 35751M	75.0 +/- 1.0	2.0 max	5.0 max	-	Z5 - Z6	39.0 - 41.0	15.0 - 17.0	Acrylated modified alkyd resin for general industrial direct-metal enamels, top coat and agriculture implements.

Aluminium Paint Medium

Products	% NVM (Volatile/ solvent)	Acid Value (mg KOH/ gm)	Color, Gardner	OH value (mg KOH/gm)	Viscosity B.F @30°C	Description / Uses
L 60501WS	50.0+/- 1.0 (WS)	1.0 max	8.0 max	8.0 max	10.0 - 20.0 Sec	For anti-rust coatings. Good adhesion to metal, having good solvent and chemical resistance.
L 60602WS	60.0+/- 1.0 (WS)	1.0 max	8.0 max	8.0 max	15.0 - 25.0 Sec	For anti-rust coatings. Good adhesion to metal, having good solvent and chemical resistance.
L 60751XL	75.0+/- 1.0 (Xylene)	1.0 max	8.0 max	8.0 max	13.0 - 17.0 Sec	For anti-rust coatings. Good adhesion to metal. Suitable for hammer tone finishes. Good solvent and chemical resistance.

Alkyd Polyol

Products	% NVM (Volatile/ solvent)	Acid value (mg KOH/ gm)	OH value (mg KOH/ gm)	Color, Gardner@ 50% solids	Viscosity Gardner @25°C/ @ 50% XL	Oil Type	%Oil (approx)	%PA (approx)	Description / Uses
AP 7030XL	70.0+/- 1.0 (Xylene)	15.0 max	90.0-100.0	6.0 max	S - U	Veg. oil / Fatty acid	30.0 +/-2.0	29.0-31.0	For industrial top coats, primers for metal, wood and aluminium substrates. Suitable for two pack PU. Excellent gloss, recoatability, fast drying, excellent chemical resistance.





Acrylic Polyols : For two pack polyurethane based system

- Suitable for wood, plastic, metal and high performance automotive coatings
- Excellent water and chemical resistance, good pot life and high gloss

Thermosetting Acrylics

- For automotive metallic base coat, clear, pigmented top coats and general stoving enamels
- Excellent weather and scratch resistance, good adhesion

Thermoplastic Acrylics

- For general purpose masonry, decorative coatings, aerosol paint
- TPA exhibits good gloss, color retention, setting properties, good outdoor durability, excellent soap and detergent resistance

Acrylic Polyols

Products	% NVM (Volatile/ solvent)	Acid Value (mg KOH/ gm)	OH Content (%)	Color Hazen value APHA	Viscosity Poise gardner @25°C	Description / Uses
AC 70501BA	50.0 +/- 2.0 (BA)	4.0 +/- 2.0	2.0 +/- 0.2	50.0	30.0 - 50.0	Suitable for general industrial coatings, wood finishing systems.
AC 70601XL	60.0 +/- 1.0 (XL)	5.0 max	2.67 +/- 0.05	50.0	25.0 - 40.0	It is used for general purpose industrial coatings suitable for wood, metal and plastic substrates. It possesses excellent performance towards mechanical and chemical resistance.
AC 70602SN	60.0 +/- 1.0 (SN-100)	10.0 max	2.67 +/- 0.05	50.0	18.0 - 40.0	Similar to AC 70601XL in terms of performance and properties but supplied in SN100 for ease of application & achieve good levelling during spraying followed by ambient temperature or forced drying.
AC 70602XL	60.0 +/- 1.0 (XL)	10.0 max	1.5 +/- 0.1	50.0	25.0 - 35.0	It has very good CAB compatibility and excellent gloss.
AC 70603XL	60.0 +/- 1.0 (XL)	10.0 max	1.5 +/- 0.1	50.0	25.0 - 35.0	It is used for general purpose industrial coatings and suitable for exterior decorative, wood, metal and plastic substrates.
AC 70604XL/CA	60.0 +/- 1.0 (XL/CA)	5.0 - 10.0	2.73 +/- 0.15	50.0	10.0 - 25.0	Recommended specially for wood coating finishes. Excellent performance towards weather resistance, gloss and gloss retention having good mechanical and chemical properties in end use application and performance.
AC 70605SN	60.0 +/- 1.0 (SN-100)	10.0 max	1.8 +/- 0.2	50.0	20.0 - 24.0	Suitable for two component system for general industrial finishes and machine protective top coats. Exhibits excellent weather resistance with good setting characteristics and pot life.
AC 70605XL	60.0 +/- 1.0 (XL)	5.0 max	1.8 +/- 0.2	50.0	12.0 - 25.0	Similar to AC 70605SN but supplied in XL for achieving good drying characteristics during air drying at ambient temperature or forced drying for industrial metal coatings.
AC 70606XL/BA	60.0 +/- 1.0 (XL/BA)	6.0 max	3.0 +/- 0.30	100.0	17.0 - 23.0	Recommended specially for automotive top coat system and industrial applications which exhibits excellent weather resistance and light fastness with good gloss retention performance.
AC 70608XL	60.0 +/- 1.0 (XL)	3.50 +/- 1.0	1.25 +/- 0.05	50.0	40.0 - 50.0	Suitable for two component PU system for air drying as forced drying primers and top coats for industrial applications. It exhibits high gloss and excellent mechanical properties having superior adhesion to metals and non-iron (aluminium and zinc) substrates.
AC 70608SN	60.0 +/- 1.0 (SN-100)	2.0 - 4.0	1.25 +/- 0.05	50.0	40.0 - 50.0	Suitable for industrial coatings, single coat adhesion for metals and nonferrous metals. Similar to AC 70608XL in terms of performance.
AC 70609XL	60.0 +/- 1.0 (XL)	10.0 max	2.67 +/- 0.2	50.0	30.0 - 40.0	Suitable for two component PU system for top coats for industrial applications. It exhibits rapid drying, excellent durability, chemical and stain resistance having superior adhesion and flow/levelling properties.
AC 70609E(XL)	60.0 +/- 1.0 (XL)	10.0 max	2.67 +/- 0.2	1.0 Gardener	30.0 - 40.0	Similar to AC 70609XL having matching performance. It is designed partly with bio based monomers to reduce carbon footprint to promote eco-friendly (green chemistry) without compromising on quality.
AC 70605XL/BA	60.0 +/- 1.0 (XL/BA)	5.0 - 14.0	1.8 +/- 0.2	50.0	8.0 - 15.0	Two component system suitable for wood, plastic metal and heavy duty maintenance and high performance architectural/industrial coatings.
AC 70609HVL	60.0 +/- 1.0 (XL)	3.0 - 0.6	2.67 +/- 0.2	50.0	70.0 - 90.0	High viscosity and rest of the properties same as AC 70609 XL.
AC 70608XL/SN	60.0 +/- 1.0 (XL/SN 100)	3.0 - 5.0	1.25 +/- 0.2	50.0	25 - 27	It is used for general purpose industrial coatings and suitable for exterior decorative, wood, metal and plastic substrates.
AC 70631XL	63.0 +/- 1.0 (XL)	5.0 - 8.0	2.6 +/- 0.15	50.0	23 - 25	Two component system suitable for wood, plastic metal and heavy duty maintenance and high performance architectural/industrial coatings.
HS 70651BA	65.0 +/- 1.0 (BA)	10.0 max	3.0 +/- 0.1	100.0	14.0 - 18.0	Two component system suitable for automotive coatings, plastic/metal and heavy duty maintenance coatings.
HS 70701XL/SN	70.0 +/- 1.0 (XL/SN 100)	14.0 max	3.1 +/- 0.2	100.0	20.0 - 30.0	Suitable for two component top coat and clear coats for general industrial finishes and machine protective top coats. Exhibits excellent weather resistance with good setting characteristics.
HS 70703XL/BA	70.0 +/- 1.0 (XL/BA)	5.0 - 8.0	3.03 +/- 0.15	50.0	23 - 25	Two component system suitable for wood coatings, plastic and metal finishes. Heavy duty maintenance and high performance protective coatings.
HS 70701EXL/SN	70.0 +/- 1.0 (XL/SN 100)	14.0 max	3.1 +/- 0.2	1.0 Gardener	20.0 - 30.0	Similar to HS 70701XL/SN having matching performance. It is designed partly with bio based monomers to reduce carbon footprint to promote eco-friendly (green chemistry) without compromising on quality.
HS 70702XL	70.0 +/- 1.0 (XL)	10.0 max	1.5 +/- 0.2	50.0	40.0 - 60.0	It has very good CAB compatibility and excellent gloss.
HS 70703XL	70.0 +/- 1.0 (XL)	10.0 max	1.5 +/- 0.2	50.0	40.0 - 60.0	It is used for general purpose industrial coatings and suitable for exterior decorative, wood, metal and plastic substrates.

Products	% NVM (Volatile/ solvent)	Acid Value (mg KOH/ gm)	OH Content (%)	Color Hazen value APHA	Viscosity Poise gardner @25°C	Description / Uses
AC 70502XLBA	50.0 +/- 2.0 (XL)	2.0 – 8.0	1.06 +/- 0.2	50.0 APHA	30.0 – 50.0	It is used for general purpose industrial coatings and suitable for exterior decorative, wood, metal and plastic substrates.
HS 70709XLBA	70.0 +/- 2.0 (XL)	10.0 max	2.70 +/- 0.2	50.0 APHA	70.0 – 110.0	High solid acrylic resin suitable for two component PU system for top coats for industrial and auto applications. It exhibits rapid drying, excellent durability, chemical and stain resistance having superior adhesion and flow/levelling properties.
AC 74511XL	50.0 +/- 2.0 (XL)	3.0 – 6.0	4.12 +/- 0.2	50.0 APHA	0.5 – 1.5	Suitable for two component Top coat and clear coats for general industrial finishes and marine protective top coats. Exhibits excellent weather resistance with good setting characteristics. Suitable for pre-fab buildings.
AC 70602LVSN	60.0 +/- 1.0 (SN 100)	2.4 – 4.8	2.55 +/- 0.15	100.0 APHA	1.4 – 4.2	Recommended specially for wood coating finishes with better storage stability. Excellent performance towards weather resistance, gloss and gloss retention having good mechanical and chemical properties in end use application and performance.
AC 70605LVXL	60.0 +/- 1.0 (XL)	5.0 max	1.8 +/- 0.2	50.0 APHA	12.0 – 25.0	Suitable for two component system for general industrial finishes and marine protective top coats. Exhibits excellent weather resistance with fast setting characteristics.
AC 70605HVXL	60.0 +/- 1.0 (XL)	10.0 max	1.8 +/- 0.2	50.0 APHA	70.0 – 90.0	Suitable for two component system for general industrial finishes and marine protective top coats. Exhibits excellent weather resistance with faster setting characteristics with superior hardness.
AC 70503XL	50.0 +/- 2.0 (XL)	2.0 – 8.0	1.97 +/- 0.2	100.0 APHA	4.0 – 12.0	Two component system suitable for wood coatings, plastic and metal finishes. Suitable for Heavy duty maintenance and high performance architectural coatings. It has very good CAB compatibility.
HS 70801BA	80 ± 1.0(BA)	10 Max.	2.0 – 2.2	50.0 APHA	60 – 90	For air-drying as well as forced drying high-solids two pack topcoats for industrial applications.
AC 70603HVXL	60.0 +/- 1.0 (XL)	5.0 – 8.0	1.5 +/- 0.3	100.0 APHA	65 – 95	It is used for general purpose industrial coatings and Suitable for exterior decorative, wood, metal and plastic substrates.
AC 70611XLBA	61.0 +/- 1.0 (XL/BA)	6.0 max	3.0 +/- 0.3	100.0 APHA	1.4 – 3.0	Two component system suitable for wood coatings, plastic and metal finishes. Heavy duty maintenance and high performance protective coatings.
AC 70552XL	50.0 +/- 1.0 (XL)	2.0 – 6.0	1.5 +/- 0.3	100.0 APHA	25.0 – 40.0	Suitable for two component PU system for air drying as forced drying high build primers and top coats for industrial applications. It exhibits high gloss and excellent mechanical / chemical properties having superior adhesion to metals and non-iron (aluminium and zinc).
AC 70505XLBA	50.0 +/- 1.0 (XL/BA)	10.0 max	1.6 +/- 0.3	100.0 APHA	36.0 – 63.0	Suitable for general industrial coatings, wood finishing systems.

CAR PUTTY RESINS – (Unsaturated Polyester Resin)

Products	Color / Clarity	% NVM (Volatile/ Solven)	Viscosity BF/ @25°C mPa.s	Acid value (mg KOH/ gm)	Gel Time @25°C/ Min	Description / Uses
CP 90601PA	Pale Greenish/ brownish	61.0 – 64.0 (Styrene)	350.0 – 450.0	15.0 max	6.0 – 8.0	It is specially designed and found suitable in manufacture of car body fillers and putties cured with benzoyl peroxides. Suitable for low temperature curing. Filler paste based on these resins show excellent sandability and do not rapidly clog on sand paper.
CP 90603PA	Pale yellowish/ brownish	64.0 +/- 2.0 (Styrene)	450.0 – 550.0	5.0 – 15.0	6.0 – 8.0	Moderate flexibility with rest of the properties same as CP 90601 PA.
CP 90605 PA	Pale yellowish/ brownish	64.0 +/- 2.0 (Styrene)	400.0 – 500.0	5.0 – 15.0	6.0 – 8.0	High flexibility with rest of the properties same as CP 90601 PA.
CP 90602PA	Pale Greenish/ brownish	65.0 +/- 1.5 (Styrene)	350.0 – 450.0	25.0 max	6.0 – 8.0	Versatile and economical grade car putty resin suitable for hand application having good sandability when cured with peroxides at ambient temperature.
CPP 90602PA	Dark brownish	70.0 +/- 2.0 (Styrene)	600.0 – 700.0 @28°C	25.0 max	6.0 – 8.0 @28°C	Specially designed for wet sanding application.

AUTO REFINISHING SYSTEMS

ACRYLIC POLYOLS FOR TWO PACK PU

Products	% NVM (Volatile/ solvent)	Acid value (mg KOH/ gm)	OH Content (%)	Color APHA	Viscosity, Poise @25°C	Description / Uses
AC 74501XL	50.0 +/- 1.0 (XL)	10.0 max	4.0+/-0.2	50.0	10.0 - 15.0	Suitable for two component PU system for rail and road transport, industrial repair system for train and tram units, marine paints and free-fab buildings. It exhibits excellent hardness, exterior durability coupled with excellent mechanical properties and ease of application such as airless spray and also under severe humidity/low temperature conditions.
AC 74603XSB	60.0 +/- 1.0 (XL/SN/BA)	8.0 max	4.5+/-0.2	100.0	26.0 - 36.0	At ambient temperature drying or forced drying two pack systems with high gloss, excellent mechanical/chemical properties with good outdoor durability especially suitable for automotive repair topcoats or clear coats.
AC 74603LVXL/ PMA	60.0 +/- 1.0 (XL/PMA)	7.0 max	4.2+/-0.2	50.0	22.0 - 36.0	Application for room temperature drying or forced drying for two pack systems for auto refinishing system (top coat and clear coats) with excellent mechanical/chemical properties with very good gloss retention, superior outdoor durability.
HS 74651XL/BA	65.0 +/- 1.0 (BA/XL)	8.0 - 12.0	4.2+/-0.2	50.0	25.0 - 45.0	Product is suitable for application requiring excellent light stability and weather resistance specially designed for air drying automotive refinish coatings. Film exhibits excellent mechanical properties having good solvent/gasoline resistance.
HS 74702LVBA	70.0 +/- 1.0 (BA)	10.0 max	4.5+/-0.3	50.0	28.0 - 45.0	Two component system especially suitable for high quality automotive refinishes-solid and top coat. Clear and related high performance top coat industrial coatings.
HS 74702HVBA	70.0 +/- 1.0 (BA)	4.0 - 9.0	4.5+/-0.3	70.0	70.0 - 130.0	Two component system especially suitable for high quality automotive refinishes-solid and top coat. Clear and related high performance top coat industrial coatings.
HS 74707BA	70.0 +/- 1.0 (BA)	8.0 - 15.0	4.2+/-0.2	70.0	22 - 24	Recommended for two component top coat / clear coat car repairs and top coats for plastic coatings. It also serves as machine lacquers, protective coatings in general industrial coatings.
HS 74702BA	70.0 +/- 1.0 (BA)	4.0 - 8.0	4.5+/- 0.3	100.0	36.0 - 60.0	Two component system suitable application for high quality automotive refinishes-solid color and top coat. Clear and high performance top coat industrial coatings.
HSP 74651XBP	70.0 +/- 1.0 (BA/XL/PMA)	15.0 max	3.2+/-0.2	50.0	80.0 - 100.0	Product for automotive refinishing coatings. Film exhibits excellent mechanical properties having good gloss, DOI and gasoline resistance.
HSP 74705XBP	70.0 +/- 1.0 (BA/XL/PMA)	15.0 max	4.3+/-0.2	50.0	50.0 - 80.0	Product for automotive refinishing coatings. Film exhibits excellent mechanical properties having good gloss, hardness, exterior durability.
HS 70703BA	70.0 +/- 1.0 (BA)	10.0 - 15.0	3.0+/- 0.2	50.0	80.0 - 140.0	Suitable for two pack PU paint systems for automotive coatings. It exhibits fast drying, high hardness, excellent gloss and good mechanical properties.
AC 74603LVXSB	60.0 +/- 1.0 (XL/SN/BA)	2.0 - 8.0	4.5+/-0.2	50.0	3.0 - 7.0	At ambient temperature drying or forced drying two pack systems with high gloss, excellent mechanical/chemical properties with good exterior durability especially suitable for making high build automotive or topcoats or clear coats.
HS 74702LVBA (P)	70.0 +/- 1.0 (BA)	10 Max	4.25±0.3	50.0	45.0 - 55.0	Suitable for two pack PU paint systems for automotive coatings. It exhibits fast drying, high hardness, excellent gloss and good mechanical properties.

Thermosetting Acrylics

Products	% NVM (Volatile/ solvent)	Acid Value (mg KOH/ gm)	Color Hazen value APHA	Viscosity Poise/ Gardner Scale@25°C	Description / Uses
TSA 7010XB50	50.0 +/- 2.0 (Xylene/BuOH)	10.0 max	1.0 max	9.0 - 12.0	Suitable for automotive metallic base coat, clear / pigmented top coats and general stoving enamel.
TSA 7020XB50	50.0 +/- 1.0 (Xylene/BuOH)	10.0 max	1.0 max	2.1 - 4.2	For general industrial finish, consumer electronics and coil coatings.
TSA 7030XB55	55.0 +/- 1.0 (Xylene/BuOH)	10.0 - 15.0	1.0 max	17.0-26.0	Suitable for automotive metallic base coat , clear / pigmented top coats and general stoving enamel.
TSA 7050XB50	55.0 +/- 1.0 (Xylene/BuOH)	12.0 Max	1.0 max	4.0 - 8.0	Suitable for automotive metallic base coat , clear / pigmented top coats and general stoving enamel with superior gloss.


Thermoplastic Acrylics

Products	% NVM (Volatile/ solvent)	Acid Value (mg KOH/ gm)	Color Gardner/ Hazen value	Viscosity Poise/ Gardner Scale@30°C	Description / Uses
TPA 4010X50	50.0 +/- 1.0 (Xylene)	10.0 max	1.0 max	40.0 – 60.0	Main application is for general purpose masonry, decorative coatings, aerosol paints. TPA exhibit good gloss, color retention, setting properties, good outdoor durability, excellent soap and detergent resistance.
TPA 4010X55	55.0 +/- 1.0 (Xylene)	10.0 max	1.0 max	95.0 – 115.0 @25°C	Main application is for general purpose masonry and decorative coatings. TPA exhibit good gloss, color retention, setting properties, good outdoor durability, excellent soap and detergent resistance.
TPA 4010X58	58.0 +/- 1.0 (Xylene)	15.0 max	1.0 max	95.0 – 140.0	Main application is for general purpose masonry, decorative coatings, aerosol paints. TPA exhibit good gloss, color retention, setting properties, good outdoor durability, excellent soap and detergent resistance.
TPA 4010X60	60.0 +/- 1.0 (Xylene)	15.0 max	1.0 max	90.0 – 140.0	Main application is for general purpose masonry, decorative coatings, aerosol paints. TPA exhibit good gloss, color retention, setting properties, good outdoor durability, excellent soap and detergent resistance.
TPA 4010X60HV	60.0 +/- 1.0 (Xylene)	15.0 max	1.0 max	255.0 – 285.0	Similar to TPA 4010X60 in terms of application and performance but supplied at high viscosity.
TPA 4020X50	50.0 +/- 1.0 (Xylene)	4.0 – 6.0	1.0 max	250.0 – 350.0 @25°C	Main application is for road marking paints, general purpose masonry and decorative coatings. TPA exhibit good gloss, color retention, setting properties, good outdoor durability, excellent mechanical properties and solvent resistance. Excellent soap and detergent resistance.
TPA 4020X58	58.0 +/- 1.0 (Xylene)	4.0 – 6.0	1.0 max	250.0 – 350.0 @25°C	Main application is for road marking paints, general purpose masonry and decorative coatings. TPA exhibit good gloss, color retention, setting properties, good outdoor durability, excellent mechanical properties and solvent resistance. Excellent soap and detergent resistance.
TPA 4020BA58	58.0 +/- 1.0 (Butyl Acetate)	4.0 – 7.0	1.0 max	110.0 – 130.0	Fatty acid modified TPA resin, solo binder for non aromatic road marking paints.
TPA 4020BA65FA	65.0 +/- 1.0 (Butyl Acetate)	22.0 – 32.0	1.0 max	30.0 – 60.0	Main application is for road marking paints, general purpose masonry and decorative coatings. TPA exhibit good gloss, color retention, setting properties, good outdoor durability, excellent mechanical properties and solvent resistance. Excellent soap and detergent resistance.
TPA 4050X55	55.0 +/- 1.0 (Xylene)	12.0 max	1.0 max	80.0 – 100.0	It has very good CAB compatibility, excellent gloss and exterior durability characteristics.
TPA 4050X65	65.0 +/- 1.0 (Xylene)	12.0 max	1.0 max	225.0 – 325.0	It has very good CAB compatibility, excellent gloss and exterior durability characteristics.
TPA 4060WS	60.0 +/- 1.0 (White Spirit)	4.0 – 10.0	1.0 max	20.0 – 30.0 @ 25°C	Fast drying specially for interior and exterior decorative coatings.
TPA 4060SN	60.0 +/- 1.0 (SN 100)	15.0 max	1.0 max	110.0 – 140.0	General purpose masonry, decorative coatings, it has excellent gloss and exterior durability characteristics.
TPA 4060HVXLWS	60.0 +/- 1.0 (White Spirit)	10.0 max	1.0 max	230.0 – 270.0 (@25°C)	High viscosity high solid fast drying specially for interior and exterior decorative coatings. With good white spirit solubility.
TPA 4020X60LV	60.0 +/- 1.0 (Xylene)	10.0 max	1.0 max	20.0 – 40.0 (@25°C)	Main application is for road marking paints, general purpose masonry and decorative coatings. TPA exhibit good gloss, color retention, setting properties, good outdoor durability, excellent mechanical properties and solvent resistance. Excellent soap and detergent resistance.
TPA 4050HVWS	50.0 +/- 1.0 (White Spirit)	5.0 max	1.0 max	80.0 – 120.0 @ 25°C	High viscosity fast drying specially for interior & exterior decorative coatings. With good white spirit solubility. Xylene free white spirit soluble TPA
TPA4030M60	60.0 +/- 1.0 (SN 100)	10.0 max	1.0 max	240.0 – 280.0	General purpose masonry, decorative coatings, it has excellent gloss and exterior durability characteristics.
TPA 4050LVWS	50.0 +/- 1.0 (White Spirit)	5.0 max	1.0 max	5.0 – 20.0 @ 25°C	Low viscosity fast drying specially for interior & exterior decorative coatings. With good white spirit solubility. Xylene free white spirit soluble TPA
TPA 4050HVXLWS	50.0 +/- 1.0 (White Spirit)	10.0 max	1.0 max	100.0 – 130.0	High viscosity high solid fast drying specially for interior and exterior decorative coatings. With good white spirit solubility.



Unsaturated Polyesters

- For production of tanks, buttons, SMC sheets, quartz marble, roofing sheets, boats and filament winding pipes
- Excellent mechanical properties

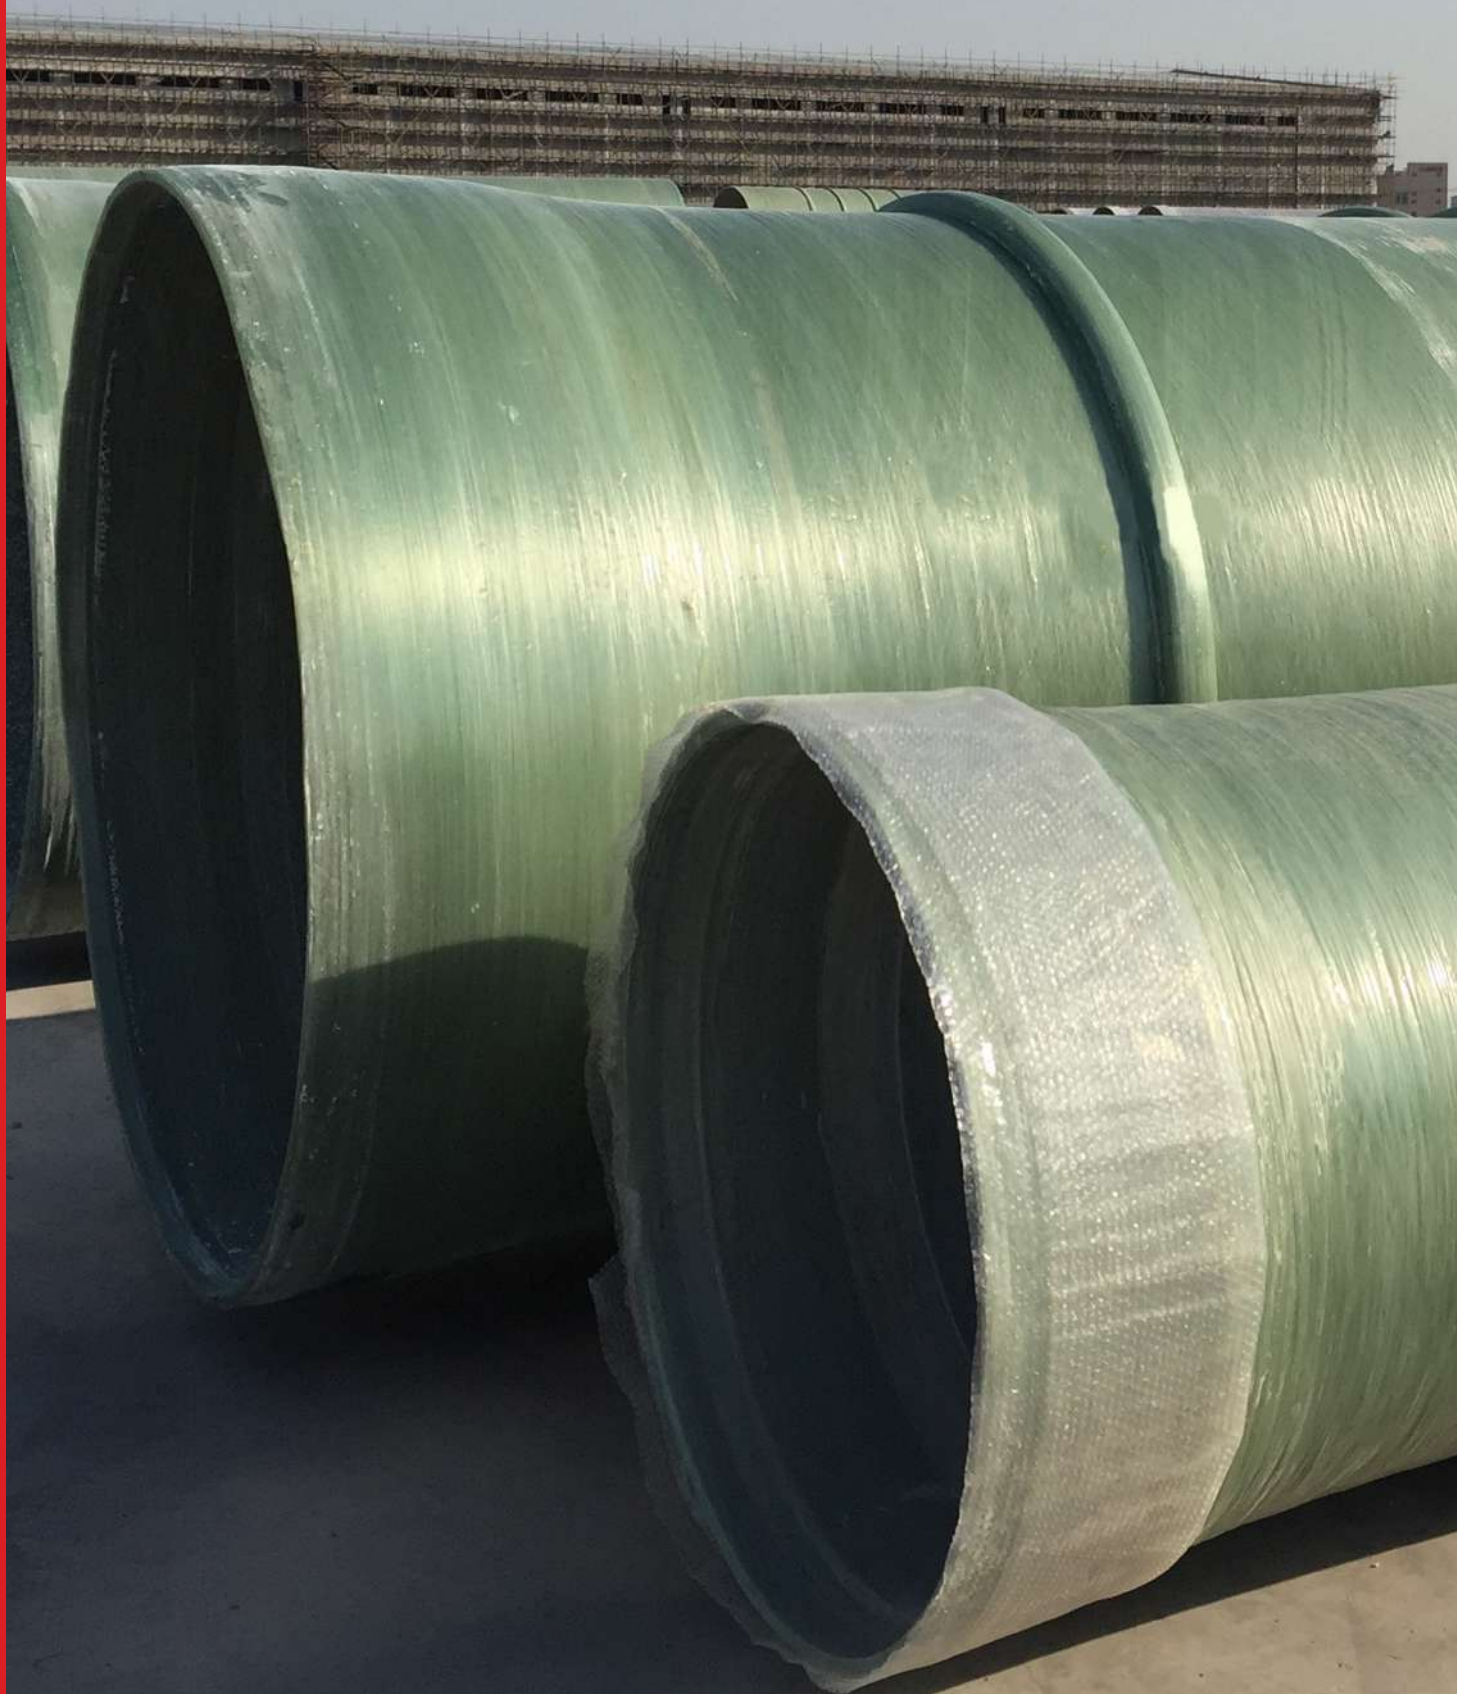

Unsaturated Polyesters

Products	Color / Clarity	% NVM (Volatile/ solvent)	Viscosity B/F @ 25°C / cPs	Gel time @25°C / Min	Description / Uses
OP 90601NA	Pale yellow clear	62.0 +/- 2.0 (Styrene)	300.0 – 400.0	10.0 +/- 5.0	Ortho based unsaturated polyester resin having outstanding mechanical properties with high resistance to hydrolysis and low absorption of water. Recommended for production of tanks and pipes by filament winding process.
OP 90601PAM	Clear liquid	62.0 +/- 3.0 (Styrene)	450.0 – 550.0	15.0 +/- 5.0	General purpose unsaturated polyester resin having low viscosity with medium reactivity. Recommended for production of tanks and general fabrication.
OP 90601UV	Pale yellow clear	64.0 +/- 3.0 (Styrene)	200.0 – 400.0	15.0 +/- 3.0	General purpose unsaturated polyester resin having low viscosity and medium reactivity with suitable UV stabilizer. It is specially designed for the manufacture of roofing sheets, tanks and general fabrication.
OP 90602PA	Pinkish cloudy	60.0 +/- 2.0 (Styrene)	275.0 – 325.0	15.0 +/- 5.0	Pre accelerated, thixotropic, ortho based unsaturated polyester resin. It has good mechanical performance combined with high elongation at break and good HDT.
OP 90608NA	Clear liquid	68.5 +/- 1.5 (Styrene)	1200.0 – 1500.0	5.0 – 10.0	Button grade orthophthalic polyester resin with high viscosity, un-accelerated and non waxed.
OP 90606NA	Pale yellow clear	64.0 +/- 2.0 (Styrene)	1000.0 – 1200.0	7.0 – 13.0 @80°C	Unsaturated polyester resin for SMC/BMC application.
OP 90611NA	Pale yellow clear	60.0 +/- 2.0 (Styrene)	600.0 – 800.0	7.0 +/- 2.0 @80°C	Ortho based unsaturated polyester resin for quartz marble.
OP 90611PA	Pale yellow clear	70.0 +/- 2.0 (Styrene)	1200.0 – 1800.0	8.0 – 12.0	Ortho based pre-promoted unsaturated polyester resin for marble putty.
IP 90604NA	Pale yellow clear	60.0 +/- 2.0 (Styrene)	450.0 – 550.0	12.0 +/- 2.0	It has good mechanical performance combined with a high elongation at break and good HDT. Recommended for tanks and pipes by filament winding.
IP 90605PA	Pinkish cloudy	60.0 +/- 2.0 (Styrene)	400.0 – 600.0	10.0 +/- 5.0	Iso-phthalic and neopentyl glycol based pre-accelerator unsaturated polyester resin modified with acrylic monomer and UV stabilizer. It is suitable for production of room temperature curing of solid surface products, sanitary wares, countertops and wall panel.
IP 90606 NA	Pale yellow clear	66.0 +/- 2.0 (Styrene)	2000.0 – 2500.0	10.0 – 13.0 @80°C	ISO based unsaturated polyester resin for SMC/BMC application.
IP 90609NA	Pale yellow clear	60.0 +/- 2.0 (Styrene)	1000.0– 1200.0	9.0 +/- 2.0 @80°C	Iso-phthalic based polyester resin having outstanding mechanical properties, high resistance to hydrolysis and low absorption of water. It is designed for specially for pultrusion application. This resin rapidly wets the surface of glass fibre in the form of cloth, roving and emulsion and powder bonded mats.
PW 90751NA	Pale yellow clear	75.0 +/- 2.0 (Styrene)	2300.0 – 2500.0	8.0 – 12.0	Ortho based unsaturated polyester resin for wood sanding sealer / top coat.
IP 90604NA(B)	Green clear	60.0 +/- 2.0 (Styrene)	250.0 – 350.0	10.0 – 15.0	Manufacturing of pipes, fittings, tanks, vessels, containers, ducts by centrifugal casting
IP 90604NA(F)	Pale yellow clear	55.0 +/- 3.0 (Styrene)	180.0 – 250.0 @ 23°C	7.0 – 12.0	Manufacturing of pipes, fittings, tanks, vessels, containers, ducts by centrifugal casting
IP 90604NA(L)	Green clear	61.0 +/- 3.0 (Styrene)	400.0 – 500.0	8.0 – 15.0	Centrifugal casting liner resin, It has good chemical resistant properties
OP 90661PA	Pale yellow clear	66.0 +/- 2.0 (Styrene)	600.0 – 800.0	8.0 – 10.0	Ortho based pre-promoted and low viscosity unsaturated polyester resin for marble putty.
OP 90591PA	Bluish Cloudy	58.0 +/- 2.0 (Styrene)	550.0 – 700.0	15.0 – 25.0	Pre accelerated, thixotropic, ortho based unsaturated polyester resin. It has good mechanical performance combined with high elongation at break and good HDT.
IP 90636NA	Pale yellow clear	63.0 +/- 2.0 (Styrene)	1100.0 – 1500.0	150.0 – 200.0 sec @130°C	ISO based unsaturated polyester resin for SMC/BMC application with high flexibility.
OP 90605PA	Bluish Cloudy	60.0 +/- 2.0 (Styrene)	800.0 – 900.0	20–30	Orthophthalic based unsaturated polyester resin for Boats, Boat hulls, yachts, Marine Structure application etc.
IP 90603PA	Bluish Cloudy	60.0 +/- 2.0 (Styrene)	800.0 – 1000.0	20–30	Isophthalic based unsaturated polyester resin for Boats, Boat hulls, yachts, Marine Structure application etc.
OP 90635NA	Pale yellow clear	63.0 +/- 2.0 (Styrene)	200.0– 300.0	6.0 – 10.0	Orthophthalic based unsaturated polyester resin for light poles and electric structures etc.
OP 90571PA	Pale yellow clear	57.0 +/- 2.0 (Styrene)	100.0 – 200.0	6.0 – 10.0	Back Up for acrylic bath tubs.

Vinyl Esters

Products	Color / Clarity	% NVM (Volatile/ solvent)	Viscosity B/F @ 25°C / cPs	Gel time @25°C / Min	Description / Uses
VE 90606NA	Yellow Clear	55.0 – 60.0 (Styrene)	400.0 – 600.0	10.0 – 15.0	Specially designed for hand lay-up and filament winding applications.


Saturated Polyesters

- For use in industrial stoving enamels including coil and can coatings
- Excellent adhesion and flexibility, high hardness



Saturated Polyesters

Products	color/ Gardner (as such) Clarity	% NVM (Volatile/ solvent)	OH Value (mg KOH/ gm)	Acid value (mg KOH/ gm)	Viscosity° B/F @ 25°C/ Poise	Description / Uses
SP 80502SN/BG	2.0 max	50.0 +/- 2.0 (SNI50/BG)	40.0 - 50.0	6.0 max	20.0 - 30.0	White base coat, overprint varnish & good Sterilisation resistance
SP 80602SN/PMA	2.0 max	61.0 +/- 1.0 (SNI50/PMA)	70.0 - 75.0	8.0 max	44.0 - 64.0	White base coat for general line application.
SP 80605SN	3.0 max	60.0 +/- 1.0 (SNI50)	30.0 - 35.0	10.0 max	Z3 - Z5	Excellent flexibility and forming properties.
SP 80607SN/BG	2.0 max	60.0 +/- 1.0 (SNI50/BG)	45.0 - 50.0	3.0 max	15.0 - 25.0	High flexibility, excellent solvent and chemical resistance.
SP 80603SN	2.0 max	63.0 +/- 1.0 (SNI50)	35.0 - 40.0	5.0 - 10.0	120.0 - 170.0	Recommended for use in can coating, tube coatings & white base coats.
SP 80653SN/BG	2.0 max	70.0 +/- 1.0 (SNI00/BG)	35.0 - 45.0	14.0 max	28.0 - 38.0	Recommended for use in coil coating, architectural top coat, single coat and back coat applications.
SP 80651SN/BG	3.0 max	65.0 +/- 1.0 (SNI50/BG)	35.0 - 40.0	8.0 max	30.0 - 40.0	Suitable for coil coating primer and general industrial stoving enamels.
SP 80654SN/BG	2.0 max	65.0 +/- 1.0 (SNI50/BG)	30.0 - 35.0	8.0 - 14.0	35.0 - 45.0	Used to formulate coil coating top coats.
SP 80657SN	2.0 max	65.0 +/- 1.0 (SNI50/BG)	30.0 - 35.0	5.0 max	40.0 - 50.0	Super durable, no loss of gloss and no yellowing in QUV.
SP 80661XL	2.0 max	66.0 +/- 1.0 (Xylene)	80.0 - 90.0	15.0 - 20.0	10.0 - 15.0	High hardness, very good adhesion, flexibility and good CAB compatibility.
SP 80702XL	2.0 max	70.0 +/- 1.0 (Xylene)	120.0 - 130.0	10.0 max	8.0 - 12.0	Suitable for industrial stoving including coil top coat-exterior/ interior applications.
SPC 80501SN/DBE	2.0 max	50.0 +/- 1.0 (SNI50/DBE)	35.0 - 40.0	8.0 max	8.0 - 16.0	Can coating, overprint varnish, base coat for decoration application.
SPC 80551SN/PMA	2.0 max	55.0 +/- 1.0 (SNI50/PMA)	50.0 - 55.0	3.0 max	45.0 - 55.0	Can coating, good hardness and flexibility.
SPC 80601SN	2.0 max	60.0 +/- 1.0 (SNI50)	65.0 - 75.0	10. max	12.0 - 20.0	Can coating, excellent flexibility and forming properties.

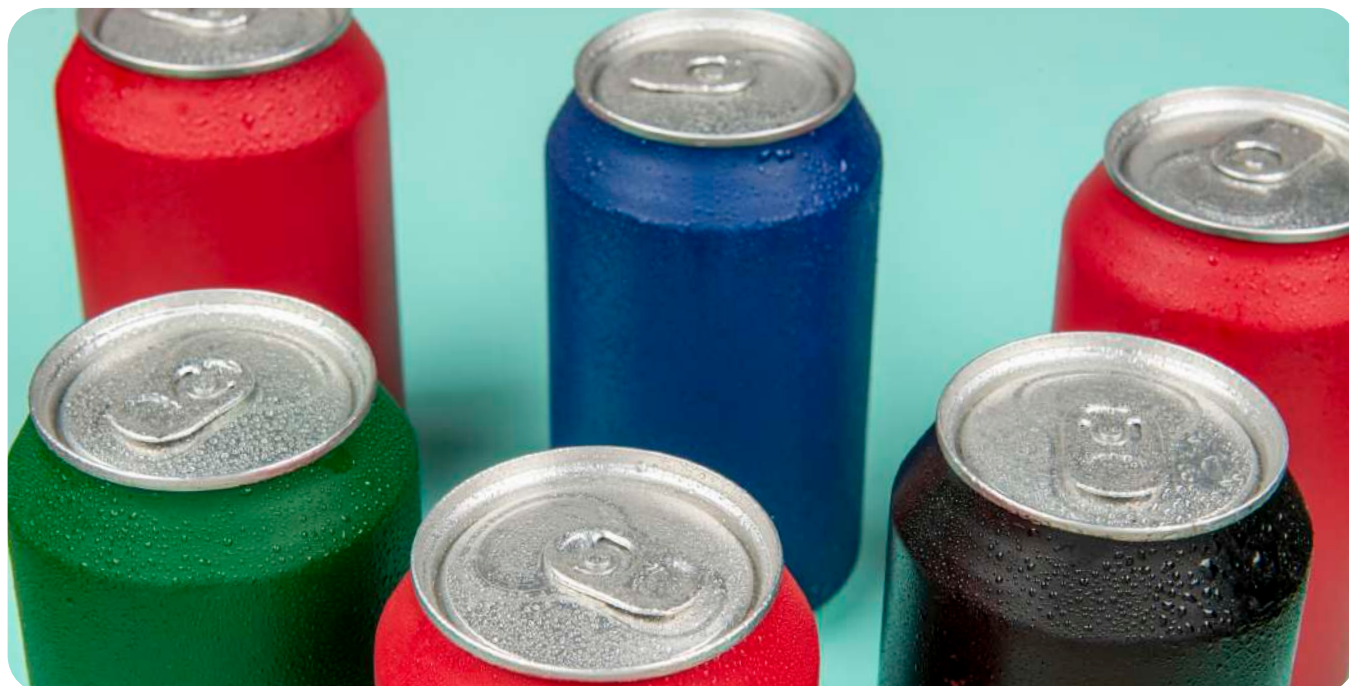

Reactive Polyamides

- For ship building industry, potting, casting, encapsulation, maintenance and marine coatings
- Good color, low viscosity, water and corrosion resistance, light stability and long pot life



Reactive Polyamides

Products	Color Gardner	% NVM (Volatile/solvent)	Viscosity B/F (@ °C) / mPa.s	Amine value (mg KOH/gm)	AHEW (Calcd)	Recommended loading pph of liquid Epoxy EEW-200	Description / Uses
HP 100125	11.0 max	-	700.0 – 900.0 (75°C)	340.0 – 375.0	~ 130.0	50.0 – 70.0	Ship building industry, potting, casting, encapsulation, maintenance and marine coatings. Good color, low viscosity, water and corrosion resistance, light stability and long pot life.
HP 100140	8.0 max	-	300.0 – 600.0 (75°C)	370.0 – 410.0	~ 95.0	45.0 – 50.0	Synthetic flooring, tank and pipe lining, metal and plastic adhesives, maintenance coatings. Moderate viscosity and long pot life. Good pigment and substrate wetting, good adhesion, chemical and corrosion resistance.
HP 100140LV	8.0 max	-	2400.0 – 4000.0 (25°C)	380.0 – 420.0	~ 95.0	50.0 – 60.0	Synthetic flooring, tank and pipe lining, metal and plastic adhesives, maintenance coatings. Low viscosity and long pot life. Good pigment and substrate wetting, good adhesion, chemical and corrosion resistance.
HP 100115	10.0 max	-	500.0 – 750.0 Ps (40°C)	220.0 – 250.0	~ 240.0	80.0 – 115.0	In combination with liquid epoxy for solvent less coatings for steel, for potting, impregnation, adhesives. Construction industry and protective coatings. Low viscosity, long pot life, low isotherm, shrinkage.
HP 100115K	11.0 max	-	150.0 – 300.0 Ps (40°C)	210.0 – 250.0	~ 240.0	80.0 – 115.0	Similar to HP 100115 however exhibits good drying and excellent hardness in damp / high humid conditions.
HP 170115XL	11.0 max	70.0+/- 1.0 (Xylene)	800.0 – 2000.0 (25°C)	162.0 – 182.0	~ 340.0	50.0 – 70.0	Surface coatings, casting, tanks and pipe coatings, adhesive coatings, masonry and pool coatings. Low viscosity, good color, water and corrosion resistance, long pot life, flexibility and impact strength.
HP 100503	11.0 max	-	350+/- 50 (25°C)	500.0+/-50.0	~ 95.0	50.0 – 70.0	In combination with liquid epoxy for solvent less coatings for steel, for potting, impregnation, adhesives. Construction industry and protective coatings. Low viscosity, long pot life, low isotherm, shrinkage.
HP 160195XL	11.0 max	60.0 +/- 2.0 (Xylene)	3000.0 – 6000.0 (25°C)	240.0 – 270.0	~ 240.0	45.0 (Solids)	It has excellent compatibility with liquid epoxy suitable for low VOC coatings. Extremely fast drying, corrosion resistance and good adhesion to different substrates.
HP 100350	10.0 max	-	90.0 – 150.0 (25°C)	365.0 – 395.0	~ 95.0	50.0	Lower viscosity compared to HP 100140. High imidazoline content and longer pot life.
HP 100960	12.0 max	-	200.0 – 400.0 (25°C)	360.0 – 380.0	~ 95.0	48.0	Specially designed for liquid epoxy suitable for casting, potting, impregnation, adhesives and solvent less coatings.
HI 100100	14.0 max	-	2.0 – 3.5 (25°C)	180.0 – 210.0	90.0 % minimum Imidazoline content	-	Excellent corrosion resistance inhibitor performs at low inclusion levels (10.0 – 1000.0 ppm). Suitable for use in wide range of oil field applications, particularly temporary corrosion protection.



Reactive Polyamines

- For industrial flooring, tank linings, solvent free coatings and adhesive for concrete.
- Modified low viscosity amine curing agent used in combination with liquid epoxy for cold curing and ambient temperature.



Reactive Polyamines / Cycloaliphatic Amines

Products	Color Gardner	Viscosity B/F (@ 25°C)/ mPa.s	Amine value (mg KOH/gm)	AHEW (Calcd)	Recommended loading pph of liquid Epoxy EEW-200	Description / Uses
HP 100205	1.0 max	500.0 – 700.0	260.0 – 300.0	102.0–105.0	58.0 – 60.0	Industrial floorings, tank linings, solvent free coatings and adhesive for concrete. Modified low viscosity amine curing agent used in combination with liquid epoxy for cold curing/ambient temperature.
HP 100205LV	2.0 max	50.0 – 70.0	260.0 – 300.0	102.0–105.0	58.0 – 60.0	Lower viscosity grade with HP 100205, rest all the properties match with HP 100205.
HP 100530	3.0 max	100.0 – 300.0	250.0 – 400.0	~ 93.0	48.0 – 50.0	Solvent free coatings. Self-levelling Industrial floorings, mortars, primers and adhesive for concrete. Modified low viscosity amine curing agent, water and corrosion resistance, low color and good color stability.
HP 100042	1.0 max	20.0 – 35.0	645.0 – 655.0	42.0 – 45.0	23.0 – 25.0	Construction industry systems suitable for solvent free, cold cure coatings. Coatings for corrosion, mastics, floorings, hardener for resin mortars. Excellent mechanical properties, resistance to neutral and alkaline solutions.
HP 100060	15.0 max APHA	100.0 – 140.0	445.0 – 495.0	~ 60.0	32.0	Heavy duty protective coatings, casting & encapsulation, structural adhesives & composite laminations. High temperature resistance, Excellent chemical and moisture resistance, good adhesion to metal substrates, low color stability having longer pot life.
HP 100686	10.0 max	100.0–400.0	290.0–330.0	~ 95.0	50.0 – 52.0	Economical grade compared to HP 100205, provides high mechanical build-up, rapid cure and suitable for low temperature applications.
HP 100618	2.0 max	290.0–450.0	260.0–280.0	~ 115.0	60.0 – 62.0	Suitable for high solid coatings, self-levelling floorings, mortars and grouts. Low color and good color stability, chemical resistance and high gloss.
HP 100237	2.0 max	25.0 – 75.0	300.0 – 350.0	~ 76.0	40.0 – 45.0	Suitable for ambient temperature cure, high level of mechanical stability, good corrosion resistance.
HP 100934	2.0 max	140.0 – 360.0	265.0 – 295.0	~ 95.0	45.0 – 50.0	Self leveling, pebble finish floorings, chemically resistant tank linings, mortars and grouts and decorative tile grouts.

Epoxy Resins

Products	Color/ Gardner	% NVM (Volatile/ solvent)	Viscosity B/F (@ 25°C)/ Ps	Epoxy value (Eq/Kg)	Epoxy Equivalent Weight (EEW)	Description / Uses
HE 175071XL	1.0 max	75.0+/-1.0	100.0 – 140.0	2.0 – 2.2	450.0 – 500.0	For surface coatings, casting, tanks and pipe coatings, adhesive coatings, masonry and pool coatings. Suitable for curing with hardeners such as HP 170115XL or HP 100042
HE 100250	0.5 max	–	110.0 – 140.0	5.15 – 5.40	185.0 – 194.0	Standard liquid epoxy resin and a wide variety of curing agents to cure this liquid epoxy resin at ambient conditions and also at elevated temperature.



Homopolymers

- Homopolymer of polyvinyl acetate emulsions
- High viscosity
- For general purpose wood adhesive and construction adhesives
- Excellent bonding and film flow properties

Copolymers

- Copolymer of VAM / VEOVA emulsions
- For interior / exterior based paints and wall putties
- Excellent bonding, scrubability, good durability and high pigment binding properties

Homopolymers

Products	% Solid	Viscosity B/F @30°C/ Ps	pH	Particle size /microns	MFFT/ °C	Sp gravity (g/ cm3)	Description / Uses
H 1010	50.0 +/- 1.0	700.0 - 1200.0	4.0 - 6.0	0.5 - 1.2	14.0 - 15.0	1.06 +/- 0.02	Homopolymer of polyvinyl acetate emulsion. High viscosity. General purpose wood adhesive having excellent bonding, film flow properties. Used mainly in general purpose wood adhesive.
H 1030	55.0 +/- 1.0	20.0 - 50.0 @23°C	4.0 - 6.0	0.4 - 1.0	14.0 - 15.0	1.05 +/- 0.02	Homopolymer of polyvinyl acetate emulsion. Good bonding strength and remains tacky for long duration. Used in adhesive / packaging industry.
H 1030 (50%)	50.0 +/- 1.0	10.0 - 30.0	4.0 - 6.0	0.4 - 1.0	14.0 - 15.0	1.05 +/- 0.02	Homopolymer of polyvinyl acetate emulsion. Good bonding strength and remains tacky for long duration. Used in adhesive / packaging industry.
H 1035	35.0 +/- 1.0	200.0 - 400.0	4.0 - 6.0	0.5 - 1.2	14.0 - 15.0	1.06 +/- 0.02	Homopolymer of polyvinyl acetate emulsion having good film bonding strength and film flow properties. Used for general purpose as wood adhesive.
H 1040	40.0 +/- 1.0	250.0 - 500.0	4.0 - 6.0	0.5 - 1.2	14.0 - 15.0	1.06 +/- 0.02	Homopolymer of polyvinyl acetate emulsion having good film bonding strength and film flow properties. Used for general purpose as wood adhesive.
H 1060	60.0 +/- 1.0	150.0 - 250.0 @ 23°C	4.0 - 6.0	0.4 - 1.0	14.0 - 15.0	1.06 +/- 0.02	Homopolymer of polyvinyl acetate emulsion having excellent adhesive properties recommended for wood used in packaging industry.

Copolymers

Products	% Solid	Viscosity B/F @30°C/ Ps	pH	Particle size /microns	MFFT/ °C	Sp gravity (g/ cm3)	Description / Uses
H 2010(50%)	50.0 +/- 1.0	700.0 - 1200.0	4.0 - 6.0	0.5 - 1.2	14.0 - 15.0	1.06 +/- 0.02	Copolymer of VAM/ VEOVA monomer with good bonding, scrubability, good durability and high pigment binding properties. Recommended for interior / exterior based paints and wall putties.
H 2020	55.0 +/- 1.0	10.0 - 40.0	4.0 - 6.0	0.3 - 0.5	14.0 - 15.0	1.05 +/- 0.02	Copolymer of VAM/ VEOVA monomer with good bonding, scrubability, good durability and high pigment binding properties. Recommended for interior / exterior based paints and wall putties.
H 2029	50.0 +/- 1.0	10.0 - 40.0	4.0 - 6.0	0.2 - 0.5	14.0 - 15.0	1.05 +/- 0.02	For VAM/ VEOVA copolymer emulsion based paint having good bonding strength, scrub resistance and alkali resistance. High pigment binding strength with good durability recommended in matt based paints.



Viscosity Conversion Table

Poise (P)	Centipoise (cP)	Gardner Holdt (Units)	Iwata cup (sec)	Ford Cup # 3(sec)	Ford Cup # 4(sec)	Krebs (KU)	Zahn Cup # 3 (sec)	Zahn Cup # 4 (sec)	Zahn Cup # 5 (sec)	Saybolt (SSU)
0.10	10.0	A4			5					60
0.15	15.0	A3			8					80
0.20	20.0		5		10					100
0.25	25.0	A2	8	15	12					130
0.30	30.0	A1	11	19	14					160
0.40	40.0	A	14	25	18					210
0.50	50.0		16		19	30				
0.60	60.0	B	19	33	25	33				320
0.70	70.0		21	32	23	35				
0.80	80.0	C	25	41	26	37				430
1.00	100	D	31	50	31	40	12	10		530
1.20	120	E	38	58	35	43	14	11		580
1.40	140	F	44	66	45	46	16	13		690
1.60	160	G	49	67	50	48	18	14		790
2.00	200	H	63	83	55	52	23	17	10	1000
2.20	220	I	69		62	54	25	18	11	1100
2.40	240	J	76		70	56	28	20	12	1200
2.80	280	K	88	113	76	59	32	22	14	1380
3.0	300	L	96	120	82	60	34	24	15	1475
3.2	320	M		130	90		36	25	16	1530
3.4	340	N			98		39	26	17	1630
3.6	360	O			103	62	41	28	18	1730
4.0	400	P			107	64	46	30	20	1950
4.4	440	Q			116		50	33	22	2160
4.6	460	R			125	66	52	34	23	2270
5.00	500	S			133	68	57	37	25	2480
5.50	550	T			146	69	63	40	27	2660
6.00	600	U			167	71	68	44	30	2900
7.00	700					74		64	45	
8.00	800					77			49	
9.00	900	V			199	81			64	4300
10.0	1000	W			270	85				4600
12.0	1250	X				95				6000
15.0	1500									
17.5	1750	Y				101				8000
20.0	2000									
23.0	2300	Z				105				10750
25.0	2500	Z1				114				11600
30.0	3000					121				
35.0	3500	Z2				129				16500
40.0	4000					133				
45.0	4500	Z3				136				
50.0	5000									
60.0	6000	Z4								21000
70.0	7000									
80.0	8000									
90.0	9000									
100	10K	Z5								46500
150	15K	Z6								69500
500	50K	Z7-Z8								

Abbreviations

NY	Non - Yellowing
WS	White Spirit
XL	Xylene
LV	Low Viscosity
HV	High Viscosity
BA	Butyl Acetate
SN	Solvent Naptha
PMA	Methoxy Propyl Acetate

CA	Cellosolve Acetate
BG	Butyl Glycol
XBP	Xylene/Butyl Acetate /PMA
NA	Non Accelerated
PA	Pre Accelerated
PAB	Pre Accelerated Boat Grade
DBE	Di Basic Ester
XSB	Xylene/Solvent Naptha/Butyl Acetate





Hitech Industries FZCO

P. O. Box : 16819, Plot No. 130/131, Road no. 1010, Jebel Ali Free Zone, Dubai, UAE.

Tel : +9714 883 5181 , Fax : +9714 883 5611

info@hitechresins.com

www.hitechresins.com

Disclaimer: In this product brochure, you can see most of our important resins and resin products. Product information is based on laboratory data and field experience. We believe this information to be reliable, but does not guarantee its applicability to the user's process or assume any liability for occurrences arising out of its use. The user, by accepting the products described here, agrees to be responsible for thoroughly testing each such product before committing to production. Our recommendations should not be taken as inducements to infringe any patent or violate any law, safety code or insurance regulation. Please refer to our website www.hitechresins.com for further details.